

AXIS

LED

Dynamic Lighting



### + Continuous lighting

The AXIS bed head unit offers the possibility of a continuous direct light, adding an aesthetic appreciation.

### + Design and ergonomics

The bed head unit can integrate an optional vertical stainless steel tube support and a shelf which can be positioned at the bottom of the bed head unit.

### + Medical gas casing


They are not only easy clean provide protection but also they are securely fastened to the cover, for easy installation and maintenance.






## TECHNICAL FEATURES

### Front view

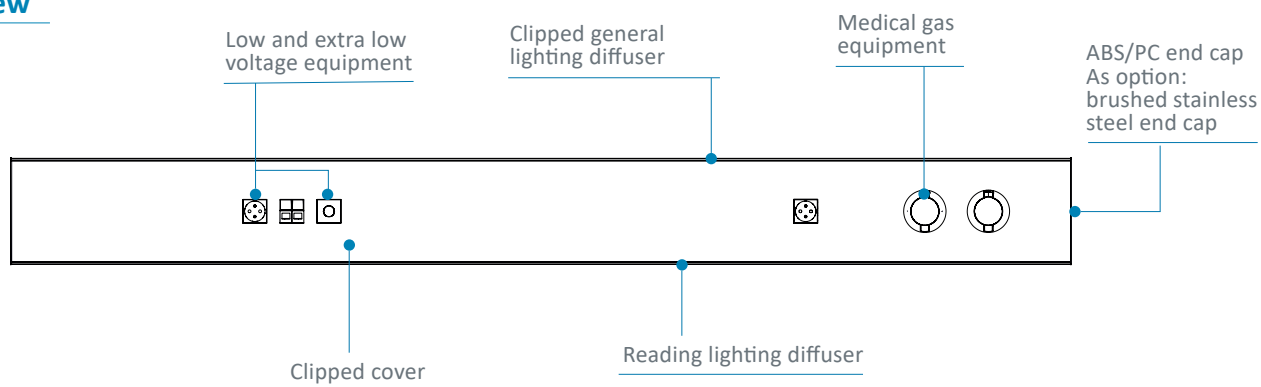

### Cross-section

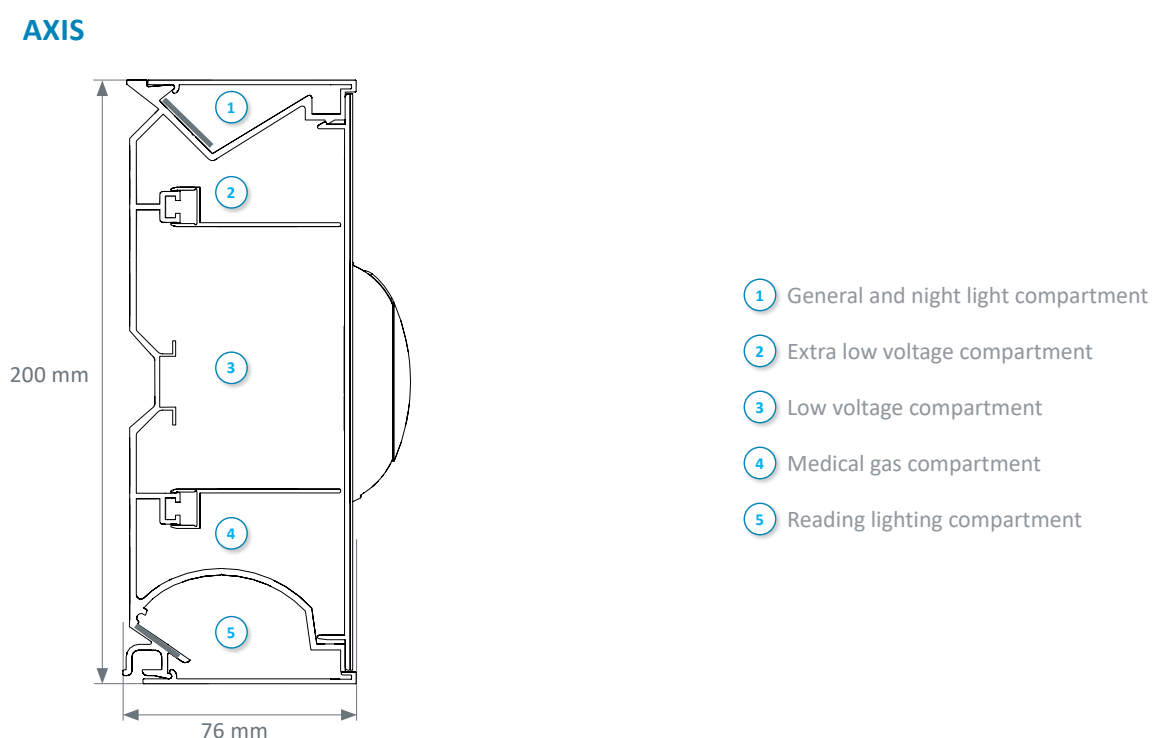

### Colours

	White RAL 9016	Grey RAL 7040	Grey RAL 9006	Plain colours or wood finishes	Brushed stainless steel
Aluminum profile	●		●		
Medical gas casing	●	●			
End caps	●	●			●
Laminate stick on the cover	SEE PAGE 302 FROM THE CATALOGUE				


## FUNCTIONALITY

The innovative design of the AXIS bed head unit offers clean lines, blending in perfectly with caring facilities. The bed head unit is easy to install and very ergonomic. The bed head unit has a monobloc cover, so that maintenance teams can easily clean and disinfect it.

### Power Supply


AXIS is designed to be fed:

- From behind (A)
- From the ceiling, by a riser (B)
- From the side (C)

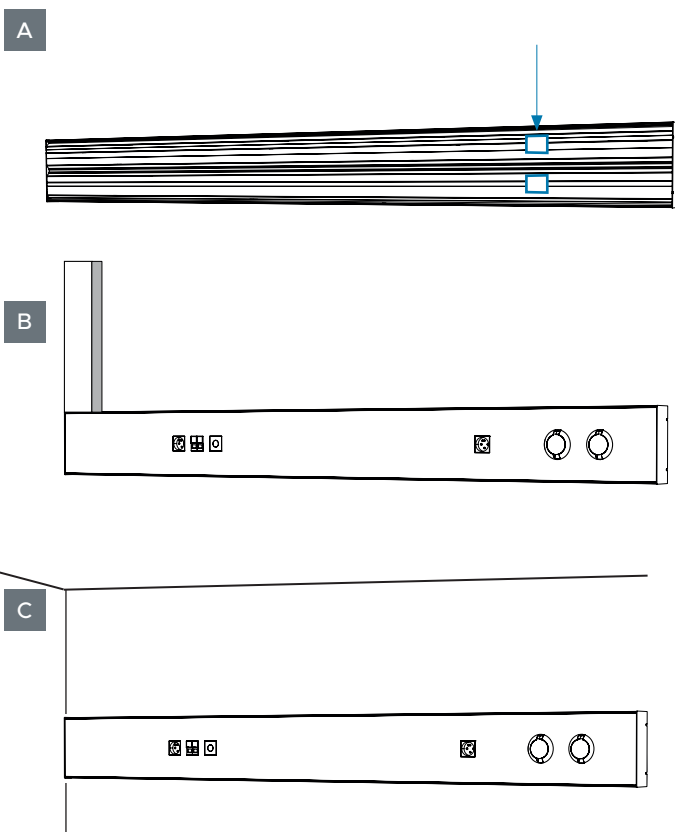

### Installation

Thanks to its screw fixing system at the back of the bed head unit, the AXIS offers a quick and easy installation.

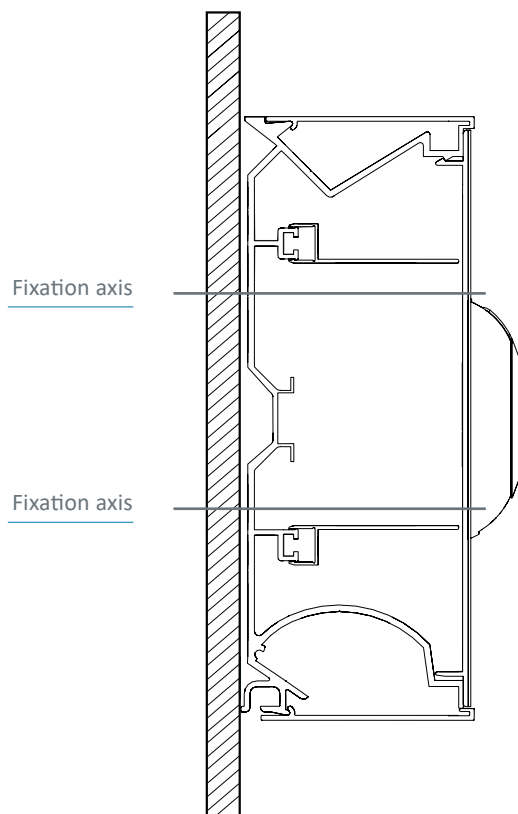

### Electrical equipment integration

The waterjet cutting of the AXIS cover enables exact and customized cutting. It can integrate all forms of outlets. Flush mounting of electrical equipment enables easier cleaning and disinfection of the product.



### Medical gas casing


For AFNOR gas outlets, ABS/PC medical gas casing are available with cover (A). For any other outlet standard, there are no medical gas casings (B).



## OPTIONAL ACCESSORIES


---

TLV has developed a range of optional equipment for the AXIS bedhead to answer the needs of healthcare professionals.

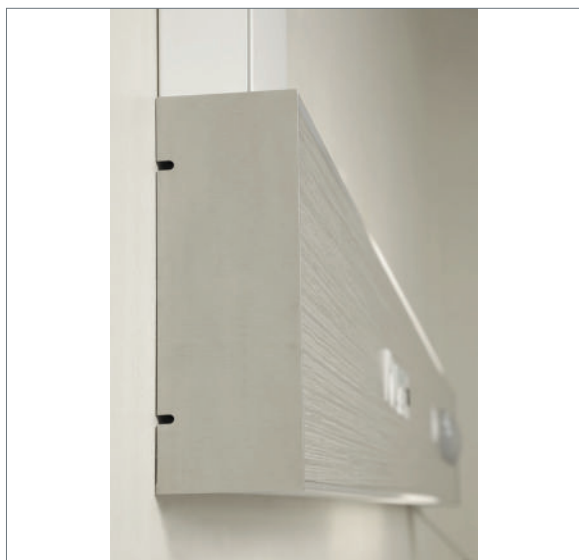

### Brushed stainless steel end cap

ABS/PC end caps can be replaced with end caps with brushed stainless steel finish to provide cohesion with all biomedical accessories.

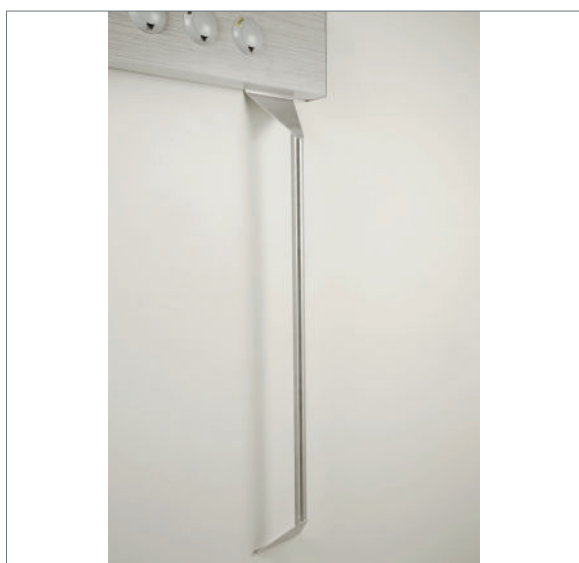

### Stainless steel vertical tube accessory support

Brushed stainless steel tube Ø 30 mm: max weight 25 kg  
Dimensions : (HxL) 1180 mm x 150 mm



### Stainless steel tablet accessories support

Brushed stainless steel tablet accessories support :  
max weight 5 kg  
Dimensions : (LxHxD) : 331 mm x 207 mm x 200 mm

## OTHER CONFIGURATIONS : COMBINATION OF ONE OR MORE WOOD PANELS AND/OR ACRYLIC PANELS WITH AN AXIS BED HEAD



Acrylic panel with inclusion  
of broken glass (or other  
decorations)

AXIS bed head



AXIS bed head

Acrylic panel with inclusion  
of broken glass (or other  
decorations)

Wood panel coordinates with the  
the colour of the laminated cover  
of the the bed head



Acrylic panel with inclusion  
of broken glass (or other  
decorations)

Reading spotlight FLEX-e-LED

AXIS bed head

Wood panel coordinates with the  
the colour of the laminated cover  
of the the bed head


## CONTROLLED LIGHTING

---

The optical design of the AXIS allows perfect control of the lighting, favouring the well-being of care teams and patients.


### General lighting

- Satin finish polycarbonate diffuser

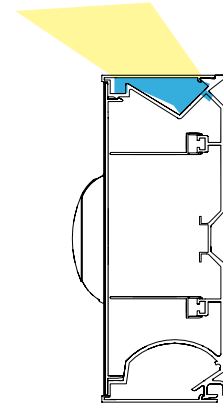


### Reading lighting

- Satin finish polycarbonate diffuser

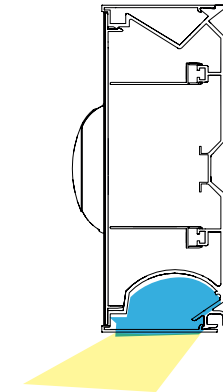

### Caring lighting


- Caring lighting combines direct (reading) lighting with indirect (general) lighting.

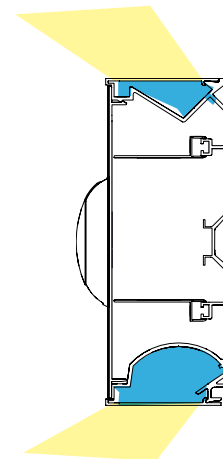

## EFFICIENT LIGHTING

### Lighting study

- Standard room
- Dimensions of the room: 3 m x 3 m, ceiling clearance 2.5 m
- Reflection coefficients: ceiling 7, walls 5, and floor 3
- Coefficient of depreciation 0.83

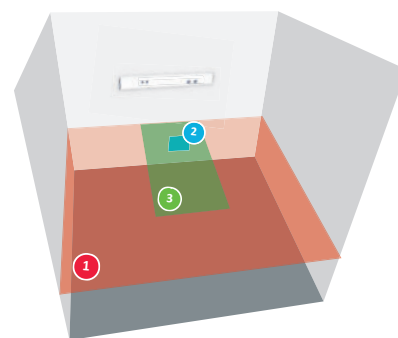

	<b>General lighting</b> Virtual general lighting plane of a surface equal to the one of the room, located 0.85 m above the floor (3 m x 3 m for a single room).	<b>Reading lighting</b> Virtual reading plane 0.3 m x 0.3 m inclined at 75° located 1.1 m from the floor and 1 m from the wall where the unit is located.	<b>Caring lighting</b> Virtual examination plane 2 m x 0.9 m located 0.85 m from the floor, centred in width and 0.1 m from the wall.
LED	<b>4 Ft module</b> 	<b>2 Ft module</b> 	<b>General and reading lighting combined</b> 
Consumption	42,2 W	20,8 W	63 W
Average lighting	138 lx	302 lx	410 lx

### Lighting power

Lighting	Modules power	Types of sources	Color temperature	Luminous Flux <sup>(1)</sup>	Consumption	System Efficiency	Driver(s)
General lighting	35,9 W (4 Ft)	LED	3000 K 4000 K	5965 lm	42,2 W	141,4 lm/W	Fixed / DALI
	44,3 W (5 Ft)	LED	3000 K 4000 K	7390 lm	51,5 W	143,6 lm/W	Fixed / DALI
General lighting (Dynamic lighting)	47,2 W (4 Ft)	LED	2700 K to 6500 K	6200 lm	54 W	114,8 lm/W	DALI
Reading lighting	17,7 W (2Ft)	LED	3000 K 4000 K	2850 lm	20,8 W	137 lm/W	Fixed / DALI
Night light	1 x 3,1 W	LED	3000 K	292 lm	3,3 W	89,8 lm/W	Fixed

- Luminous flux maintenance factor : L80B10 to 60 000 hours
- MacAdam Ellipse: 3 SDCM
- LED sources photobiological risk : RG1

<sup>(1)</sup> All the luminous flux indicated in the brochure are based on the flux of the LED modules also known as system flux.

Luminaire output flux = (Module flux) x (optical efficiency), the optical efficiency of the luminaire is indicated in the Eulumdat file (LDT line 23) available for download on our website or on request.





## Dynamic Lighting



The AXIS bed head unit is available with dynamic lighting.  
For more information, please read the dedicated brochure.

## Norms & certifications

- EN ISO 13485: Quality management systems
- CE Medical Devices Marking according to the (EU) Rules 2017/745
- EN ISO 11197: Medical supply units
- EN ISO 7396-1: Medical gas pipeline systems - Part 1
- European rules for caring centers lighting

Bed head units, Wall lighting units, Ceiling pendants, Suspended Beams & Columns,  
Special care bed head units, Sealed lightings, Medical gas monitoring & Biomedical Accessories

